



**Figure 1**

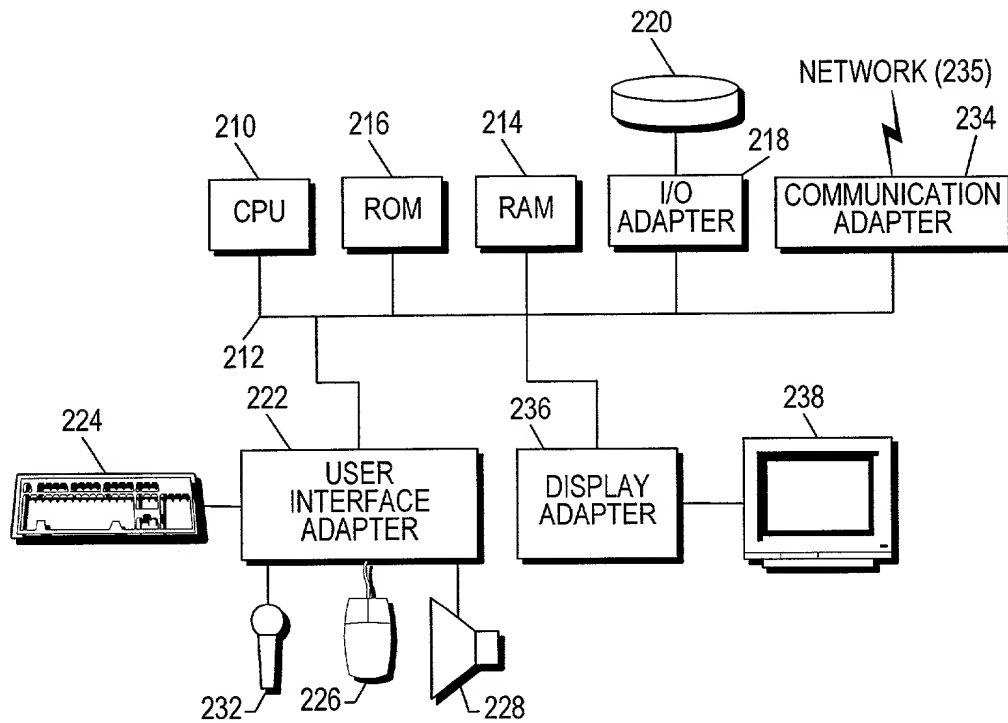


**Figure 2**

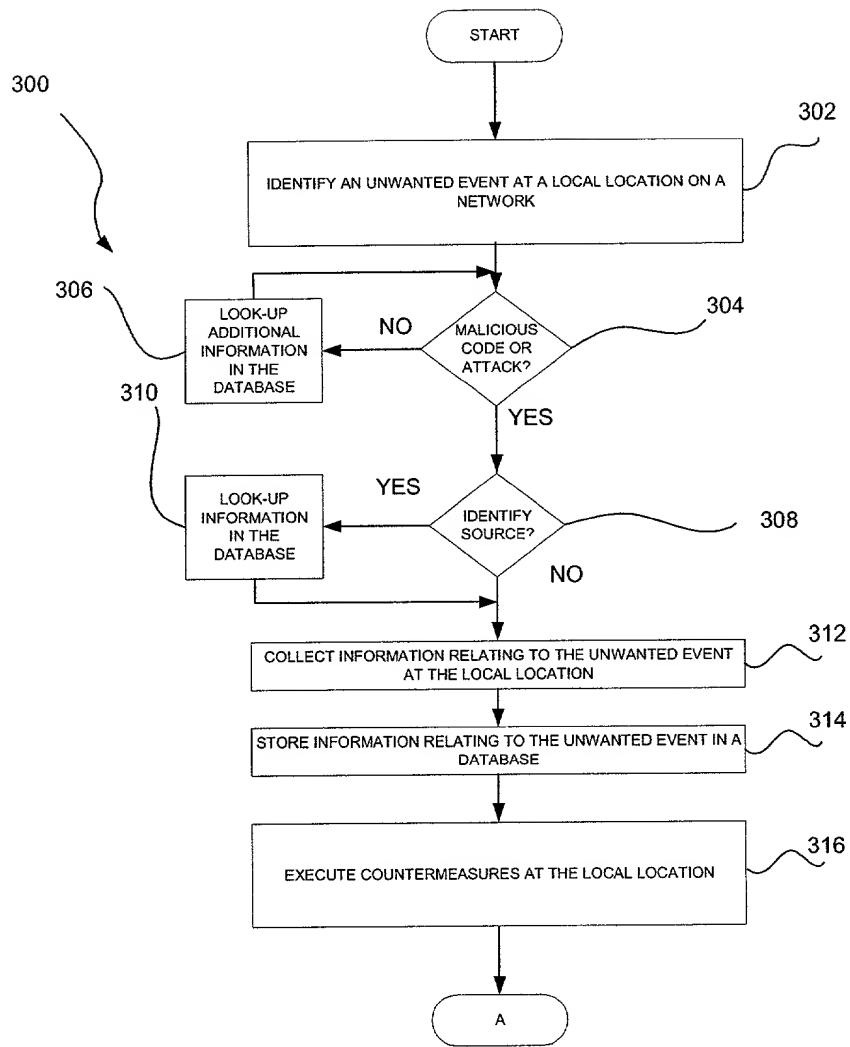

**Figure 3A**

300

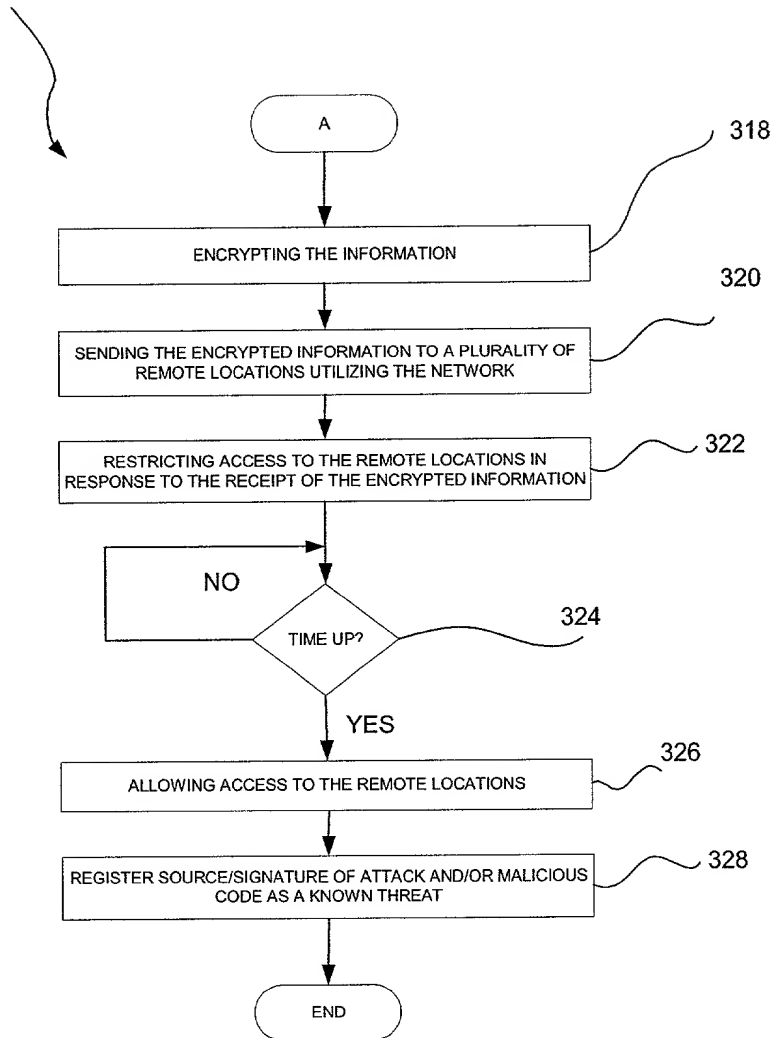


**Figure 3B**

400




<b>Type</b>	Type of attack (ie DoS attack, SPAM-Relay attempt)
<b>Context</b>	Traits of the attack. Eg: for a virus outbreak, this could be virus name. For a SPAM attempt, this could be subject, mail headers, magic number for the message, etc.
<b>Protocol</b>	Protocol on which attack is taking place (ie SMTP, NNTP, FTP etc)
<b>Severity</b>	Severity level of attack
<b>ReportingIP</b>	Server reporting attack. (Omitted when tip-off is relayed onward from hub, to protect clients).
<b>ReportingFQDN</b>	Domain of server reporting attack (same restrictions as above).
<b>SourceIP</b>	IP address at source of attack.


**Figure 4**

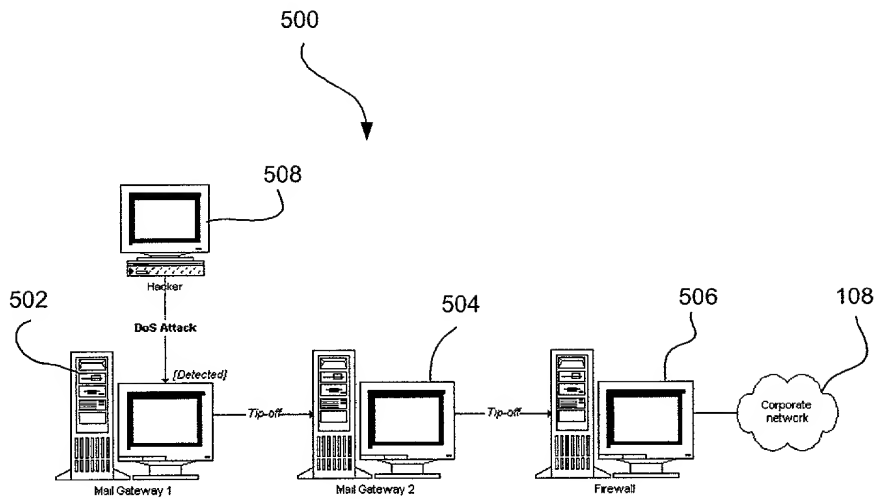

**Figure 5**

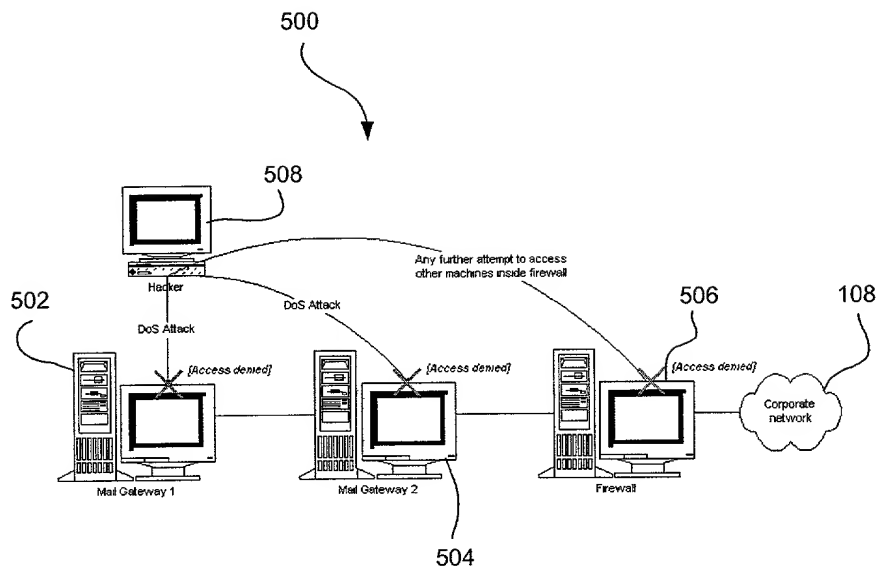

**Figure 6**

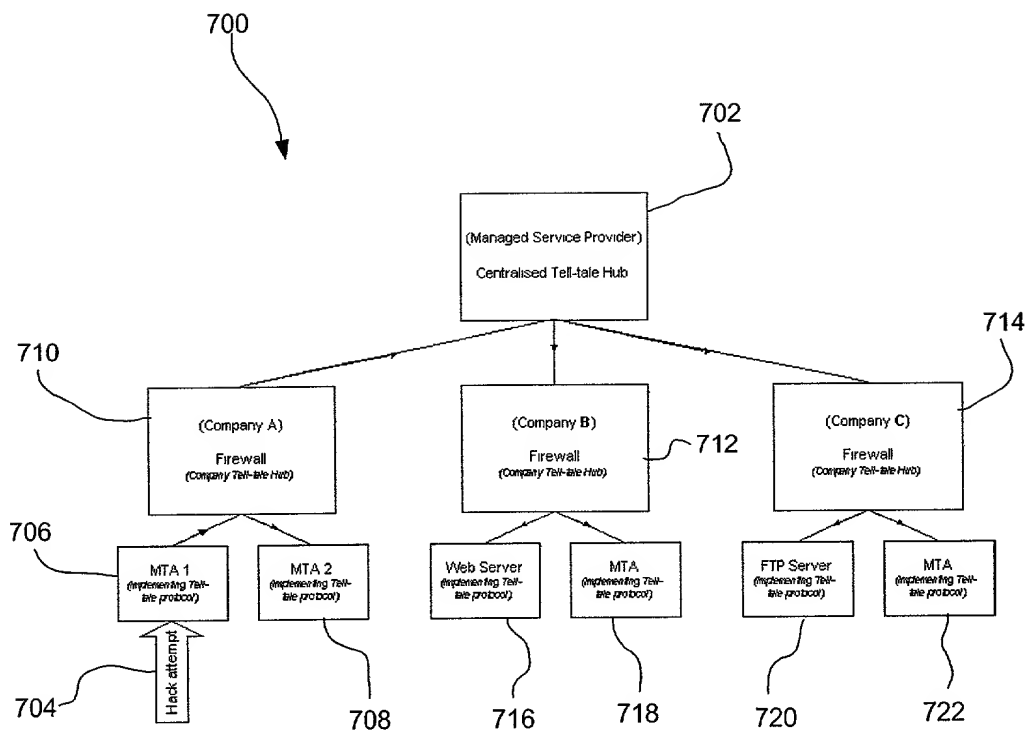

**Figure 7**